
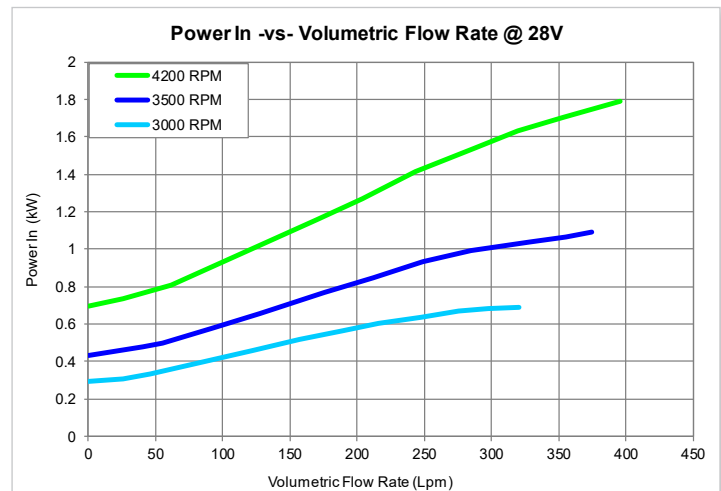


PUMP FEATURES

- Fully controllable or single speed
- High efficiency design
- 12 or 24 volt models
- Corrosion and water resistant
- Compact and quiet

SPECIFICATIONS

Rated Voltage	9-18 VDC or 18-32 VDC
Operating Temperature	-40° to 95°C (203°F)
Storage Temperature	-40° to 125°C (257°F)
Controlled or single speed	CAN

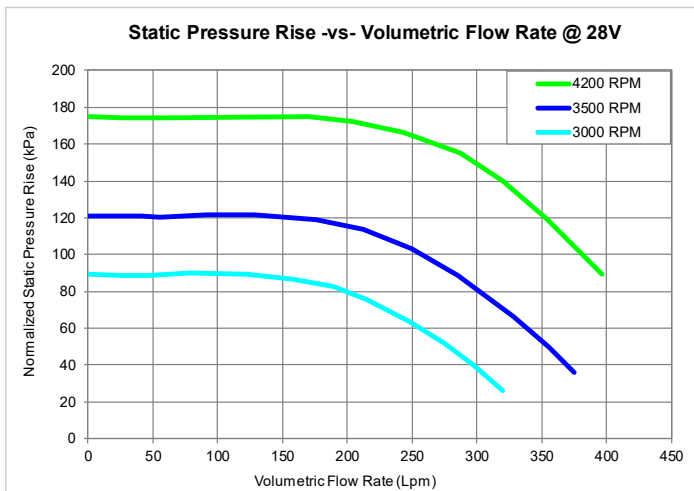

CONTROLLER FEATURES

- Custom configurations available
- Behaves as an on/off controller in absence of CAN
- Full variable control by: CAN SAE J1939-15
- Protected from transients, short circuit, and reverse battery
- Diagnostic capability

SPECIFICATIONS

Power Supply	12 VDC -or- 24VDC
Weight	15.5 lbs (7 kg)
Inlet Connection	2.0" (50.8 mm) hose
Outlet Connection	2.0" (50.8 mm) hose
Target Life	20,000 hours
Temperature Range	-40 to 95° C (203°F)
Housing Construction	Cast Aluminum